



REQUIRED FOR CITY  
PROJECTS ONLY

- \* END, PULL, GATE & CORNER POSTS: 4"
- \* TOP & BRACE (MID) RAIL: 1 1/4"
- \* TRUSS ROD 1/2" Ø THREADED WITH TURN BUCKLES FOR ADJUSTMENT
- \* TENSION WIRES REQUIRED

#### NOTES:

1. FENCE FABRIC SHALL BE SECURED TO GATE FRAMES WITH KNUCKLED SELVAGE ALONG TOP EDGE FOR CHAIN LINK FENCE INSTALLATIONS.
2. MINIMUM POST LENGTH: 9'-0"
3. ALL COMPONENTS OF FENCE SHALL BE VINYL COATED-COLOR BLACK.
4. PLASTIC PRIVACY SLATS TO BE INSTALLED & EACH SLAT WILL BE SECURED TO FENCE BY DRILLING HOLE IN BOTTOM OF SLAT & SECURING THEM TO FENCE USING ALUMINIUM TWIST WIRE.
5. FOR CITY APPLICATIONS, 3 STRAND BARBED WIRE SHALL BE INSTALLED ATOP THE FENCE.

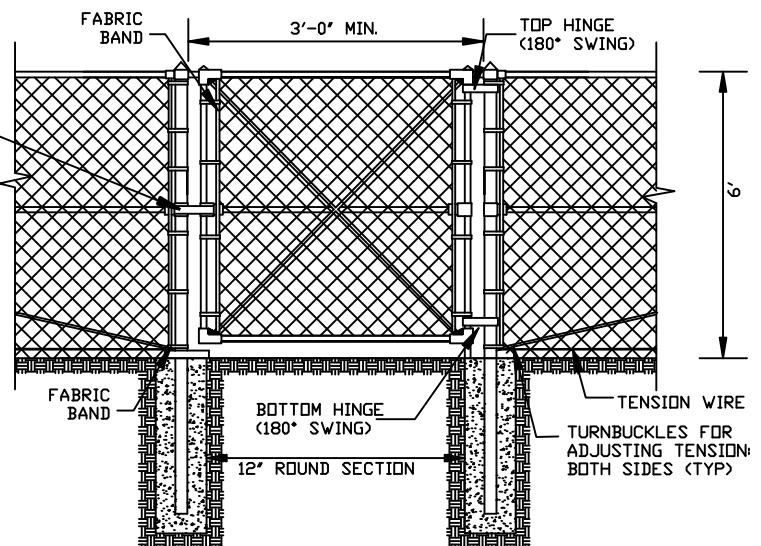

CITY OF EDMONDS

REVISIONS		STANDARD DETAIL		
APPROVED BY	DATE	CHAIN LINK FENCE DETAIL		
		DATE	SCALE	DWG NO.
		8/17/06	NTS	E8.15